


FTB104B customer terminal box

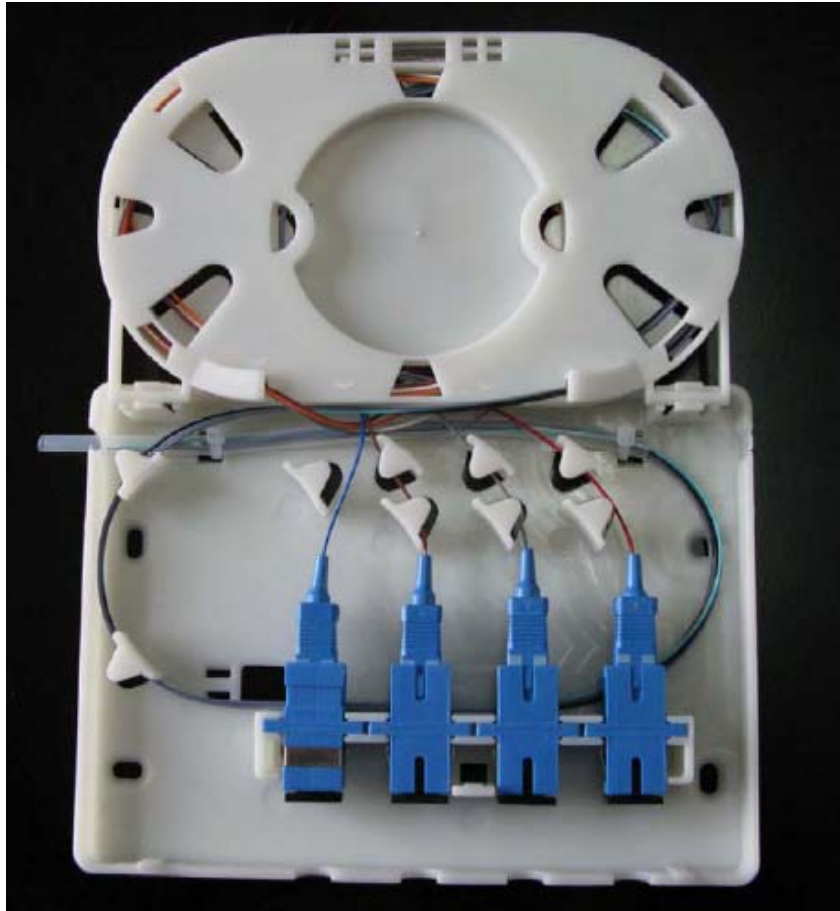


Introduction:

FTTH model of Fiber Optic Terminal Box is a newly developed by our company for application of FTTH. The box is light and compact, especially suitable for protective connection of fiber cables and pigtails in FTTH.

1. Features of the box

- 1.1 This box could be used for wall-mounted and rack-mounted applications;
- 1.2 The base and cover of the box adopts “self-clip” method, which is easy and convenient to open and close;
- 1.3 Could be used for adaptors such as SC,FC, etc;
- 1.4 The max capacity is 4 fibers;

2. The fiber route and main components of the box

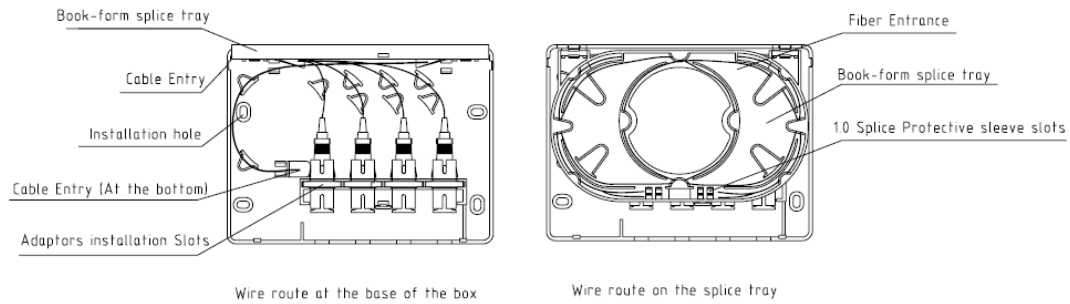

Pic1: The fiber route schematic diagram

3. Installation method

3.1 Open the package of the box to check all the components. See following Pic2 (the adapter is as optional component).



Pic2: components

3.2 Press the front side of the box, withdraw the cover and slide it backwards.

3.3 Indoor wiring fiber cable needed to lead in the location that fix the terminal box, the length of stripping is about 120cm from the end.



Pic 3: the length of stripped fiber cable



Pic4: fiber after stripping



Pic5: use EVA transparent tube to protect the stripped fiber


3.4 It is suitable for two routing methods: dark-routing and right-routing, see dark-routing leading in Pic6, see right-routing leading in Pic7/8.



Pic6: dark-routing leads in box
fixes by nylon tie



Pic7: right-routing leads in box entrance

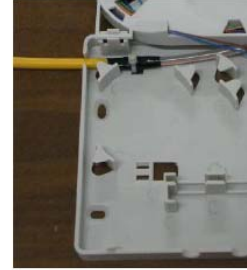


Pic8: right-routing leads in box and
and fixes by nylon tie

3.5 Outside fiber cable leads in fiber tray through cable outlet of tray as picture 9/10.




Pic9: thread the fiber to the cable inlet

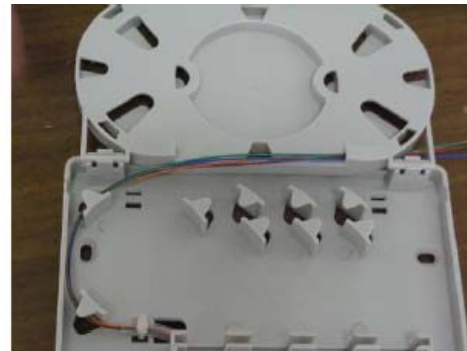


Pic10: the fiber leads in fiber tray


3.6 Installing the adaptor, inserting the pigtail plug, Taking the pigtail through into splice tray. Like Picture 11/12/13

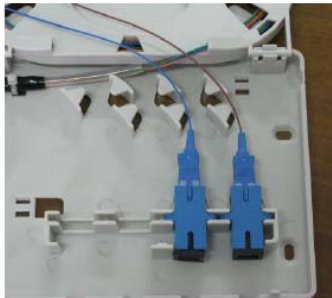

Pic11: install the adaptor and pigtail

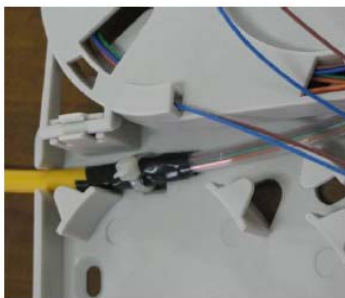

Pic12: put the pigtail through into the inlet port

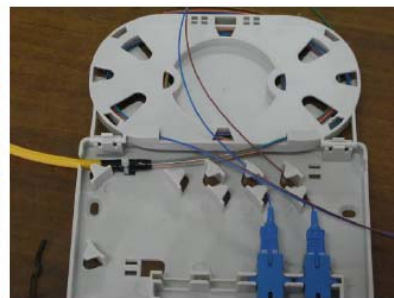


Pic13: pigtail inserted the
tray

3.7 Splice as per usual. Then put the splice protective tube into the slot of tray. Like picture 14/15/16



Pic14: after shrink, splice protective
tube put into the slot

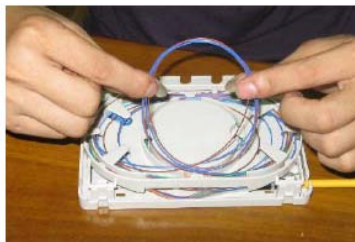



Pic15: splice



Pic16: panorama

4. The installation and application


4.1 According to the size of box size, drill the hole for M4 expand bolt as Pic17/18.

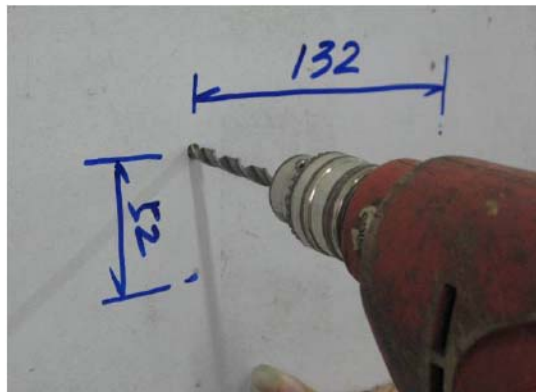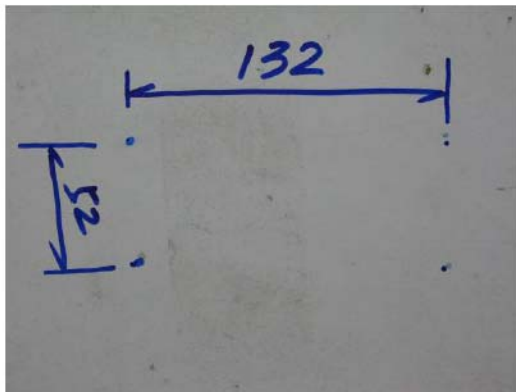

Pic17: the installation hole for the box wall-mount

Pic18: drill the plastic expand hole

4.2 Knocking the plastic expand bolt into the hole.

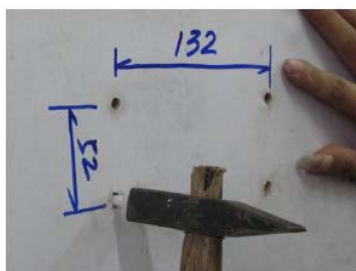

Pic19: knocking the plastic expand bolt

Pic20: fixing the box


Pic21: the box after fixing

4.3 Fixing the box to wall with 4×25 screw thread bolt as Picture 20/21.

4.4 Cover the tray and terminal box



Pic22: cover the terminal box

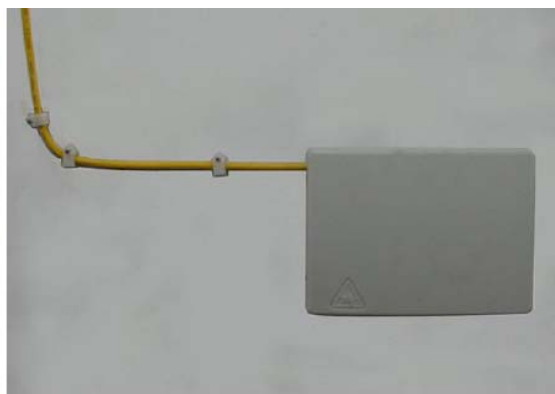

Pic23: after installation

5. Main Technical Indexes

5.1 Environmental Temperature: $-25^{\circ}\text{C} \sim 40^{\circ}\text{C}$;

5.2 Max capacity: 4 fibers;

5.3 Suitable types of fiber cables: 4 fibers indoor fiber cables;