


ADSS 2.5kN

1. Cable cross-section

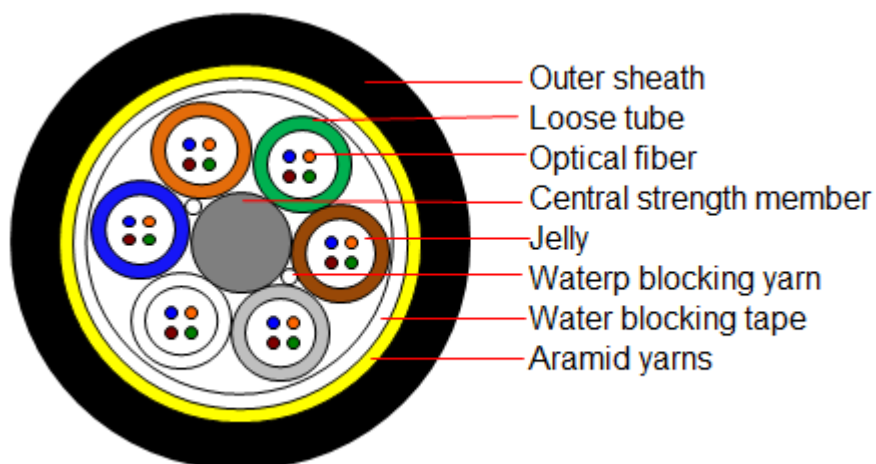

2. Cable Specification

2.1 Introduction

Loose tube construction, tubes jelly filled, elements (tubes and filler rods) laid up around non-metallic central strength member, polyester yarns used to bind the cable core, water blocking tape wrapped the cable core, aramid yarn reinforced and PE outer sheath.

2.2 Fiber color code

Fiber color in each tube starts from No. 1 Blue.

1	2	3	4	5	6	7	8	9	10	11	12
Blue	Orange	Green	Brown	Gray	White	Red	Black	Yellow	Purple	Pink	Aqua

2.3 Color codes for loose tube

Tube color starts from No. 1 Blue.

1	2	3	4	5	6
Blue	Orange	Green	Brown	Gray	White

2.4 Cable structure and parameter

SN	Item	Unit	Value		
1	No. of fibers	count	12	24	48
2	No. of fibers per tube	count	2	4	12
3	No. of tubes	count	6	6	4
4	Cable diameter($\pm 5\%$)	mm	10.6	10.6	11.8
5	Cable weight($\pm 10\%$)	kg/km	84	86	107
6	MAT (MAX. Allowable Working tension)	N	2500		
7	Short term crush	N/100mm	1000		

Note: Mechanical sizes are nominal values.

3. Characteristic of Optical Cable

3.1 Min. bending radius for installation

Static: 10 x cable diameter

Dynamic: 20 x cable diameter

3.2 Application temperature range

Operation: -40°C ~ +60°C

Installation: -10°C ~ +60°C

Storage/transportation: -40°C ~ +60°C

3.3 Main mechanical & environmental performance test

Item	Test Method	Acceptance Condition
Tensile Strength IEC 60794-1-2-E1	- Load: Maximum installation tension - Length of cable: about 50m - Load time: 1min	- Fiber strain $\leq 0.33\%$ - No fiber break and no sheath damage.
Crush Test IEC 60794-1-2-E3	- Load: Short term crush - Load time: 1min	- Loss change $\leq 0.1\text{dB}@1550\text{nm}$ - No fiber break and no sheath damage.
Impact Test IEC 60794-1-2-E4	- Points of impact: 3 - Times of per point: 1 - Impact energy: 3J	- Loss change $\leq 0.1\text{dB}@1550\text{nm}$ - No fiber break and no sheath damage.
Repeated Bending IEC 60794-1-2-E6	- Bending radius: 20 x OD - No. of cycle: 25	- Loss change $\leq 0.1\text{dB}@1550\text{nm}$ - No fiber break and no sheath damage.
Torsion IEC 60794-1-2-E7	- Length: 1m - Twist angle: $\pm 180^\circ$ - No. of cycle: 10	- Loss change $\leq 0.1\text{dB}@1550\text{nm}$ - No fiber break and no sheath damage.

4. Characteristic of Optical Fiber

G652D fiber information

Mode field diameter (1310nm):	9.2 μm \pm 0.4 μm
Mode field diameter (1550nm):	10.4 μm \pm 0.8 μm
Cut off wavelength of cabled fiber (λ_{cc}):	$\leq 1260\text{nm}$
Attenuation at 1310nm:	$\leq 0.36\text{dB/km}$
Attenuation at 1550nm:	$\leq 0.22\text{dB/km}$
Bending loss at 1550nm (100 turns, 30mm radius):	$\leq 0.05\text{dB}$
Dispersion in the range 1288 to 1339nm:	$\leq 3.5\text{ps}/(\text{nm}\cdot\text{km})$
Dispersion at 1550nm:	$\leq 18\text{ps}/(\text{nm}\cdot\text{km})$
Dispersion slope at zero dispersion wavelength:	$\leq 0.092\text{ps}/(\text{nm}^2\cdot\text{km})$
Polarization mode dispersion link value:	$\leq 0.1\text{ps}/\sqrt{\text{km}}$