

3GPP Surveillance Camera TL-SC3000



3GPP offers remote monitoring home & office from anywhere within a mobile phone's 3G/GPRS service area

Both MJPEG and MPEG-4 codec are available

Hybrid analog & digital output adapts TL-SC3000 to more peripheral players



Description:


TL-SC3000 from TP-LINK is an ideal choice for home & office monitoring. This self-contained IP Camera lets you keep track of your home, kids, workplace --- whatever's important to you.

Well equipped with all the basic functions such as sensitive Panasonic MOS sensor, granular motion detection, email/FTP alerts, TL-SC3000 distinguishes itself by outstanding features such as 3GPP support, dual codec, hybrid analog & digital output, etc. which ensure the excellent availability and performance.

Specifications:

SPECIFICATIONS	TL-SC3000	
Network		
LAN Port	YES	
LAN Speed	10/100 Based-T Ethernet	
Supported Protocols	DDNS, PPPoE, DHCP, NTP, SNTP, TCP/IP, ICMP, SMTP, FTP, HTTP, RTP, RTSP	
Frame Rate	NTSC:30, PAL:25	
Number of Online Users	10	
Security	Multiple user access levels with password	
Web management software	YES (Control up to 16 network cameras simultaneously)	
Video / Audio		
Video Compression	MPEG4 / MJPEG	
Video Remote Control	YES	
Video Adjustment	Brightness, Contrast, Saturation and Hue	
Camera		
Image Sensor	1/3.6" image sensor	
Pixels	738(H) x 480(V)	
Lens	f3.6mm	
F-number	F2.0	
Viewing Angle	80°	55.6°
Shutter Speed	1 / 60 (1/50) to 1 / 100,000 sec.	
Min Illumination	1 Lux / F2.0	
Video Output	1.0 Vp-p, 75Ω	
BLC	AUTO	
White Balance	ATW	
Others		
Remote Control	YES	
Motion Detection	YES	
Power	DC12V, 1A	
Operating Temperature	0~40°C	
Humidity	85%	
Minimum Web Browsing Requirements	<ul style="list-style-type: none"> •Pentium 4 CPU 1.3 GHz or higher, or equivalent AMD •256 MB RAM •AGP graphics card, Direct Draw, 32MB RAM •Windows XP, Windows 2000 Server, ME, 98, DirectX 9.0 or later •Internet Explorer 6.x or later 	
Dimensions (L x W x H)**	152.5 x 115.2 x 40.2 mm (6.00 x 4.54 x 1.58 in.)	
Shipping Weight	812g (1.79 lbs) including mounting bracket and power supply	
Indoor / Outdoor Application	Indoor	

Diagram:

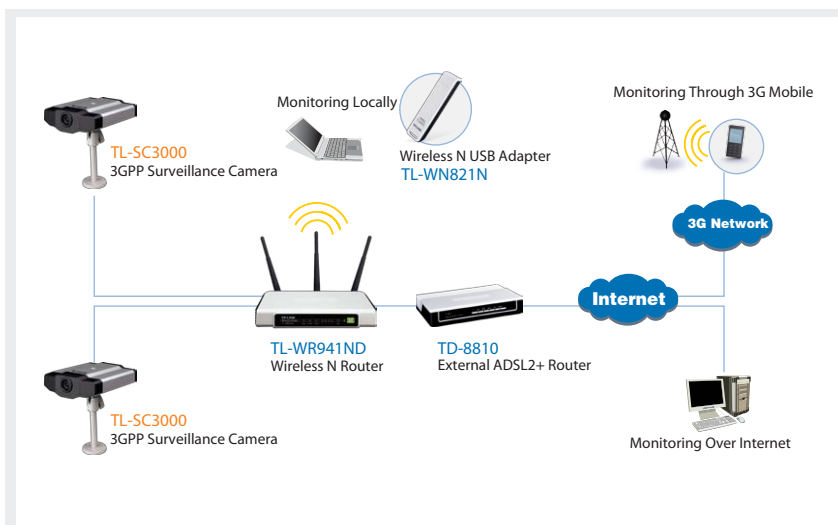

Features:

- Remote access through Web Browser, Quicktime Player, Application Software
- Supports 3GPP
- Controls up to 16 network cameras simultaneously
- Up to 10 unicast users
- 1/3.6" Panasonic MOS sensor
- Both MJPEG and MPEG-4 codec are available
- Highest video transmission rate at 30fps(NTSC)/25fps(PAL) in VGA resolution
- Multi-level log-in authorization
- Multi-area, multi-level sensitivity motion detection
- Hybrid digital / analog video output

Package:

- TL-SC3000 3GPP Surveillance Camera
- Quick Installation Guide
- Adapter and power cord
- Bracket
- RJ45 network cable
- CD-ROM disc containing user manuals & the video viewer software

Related Products:

- Wireless N Router TL-WR941ND
- Wireless N USB Adapter TL-WN821N
- External ADSL2+ Router TD-8810

Specifications are subject to change without notice. is a registered trademark of TP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies Co., Ltd.