


6-FM-8.5

FM Series
Battery For General Use

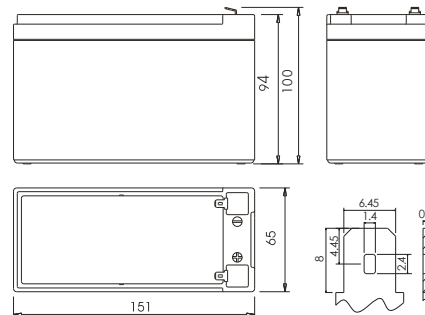


Specifications

Nominal Voltage		12V
Rated Capacity(20 hour rate)		8.5Ah
Dimensions	Total Height (with terminals)	3.94 inches(100mm)
	Height	3.70 inches(94mm)
	Length	5.94 inches(151mm)
	Width	2.56 inches(65mm)
Weight		Approx. 5.50 Pound(2.50kg)


Characteristics

Capacity 77°F(25°C)	20 hour rate (0.425A)	8.5Ah
	10 hour rate (0.786A)	7.86Ah
	5 hour rate (1.36A)	6.8Ah
	1 hour rate (5.10A)	5.1Ah
	15 minute rate (13.5A)	3.4Ah
Internal Resistance	Full Charged Battery 77°F(25°C)	19mΩ
Capacity Affected by Temperature (20 hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 months storage	91%
	Capacity after 6 months storage	81%
	Capacity after 12 months storage	60%
Max. Discharge Current 77°F(25°C)	120A(5S)	
Terminal	F1\F2	
Charge (Constant Voltage)	Cycle	Initial Charging Current Less than 2.55A Voltage 14.4 V / 77°F (25°C) Equalization temperature compensation coefficient: -24mV/°C
	Float	Voltage 13.8V / 77°F (25°C) Compensation coefficient of floating charging temperature: -18mV/°C

Discharge Curves 77°F (25°C)

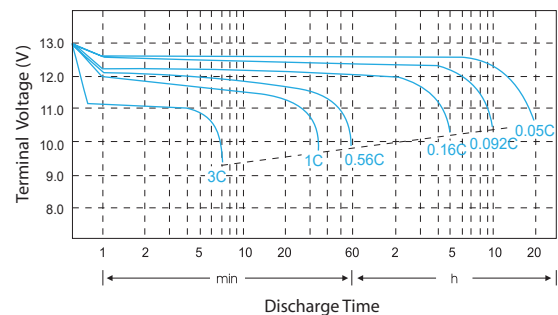

Relationship Between Charge Voltage and Temperature

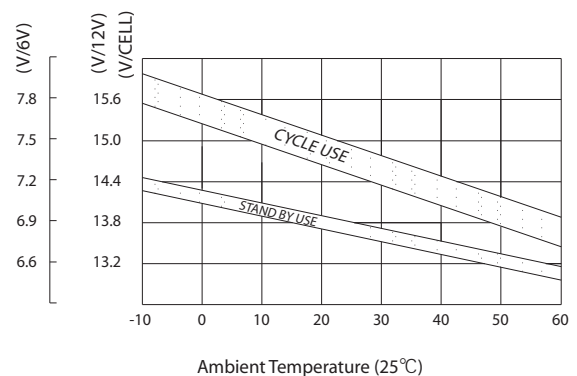

Constant Current Discharge (Amperes @25°C)


F.V/Time	5Min	10Min	15Min	30Min	60Min	2H	3H	4H	5H	10H	20H
1.60	32.4	20.6	14.9	9.18	5.41	3.18	2.19	1.70	1.40	0.804	0.437
1.65	31.7	20.0	14.2	8.94	5.30	3.06	2.16	1.67	1.38	0.786	0.432
1.70	30.2	19.1	13.7	8.77	5.21	3.02	2.14	1.65	1.38	0.786	0.429
1.75	28.9	18.4	13.5	8.67	5.10	2.99	2.14	1.64	1.36	0.786	0.425
1.80	27.2	18.2	13.2	8.43	5.00	2.89	2.09	1.62	1.34	0.767	0.415

Constant Power Discharge (Watts Per Cell@25°C)


F.V/Time	5Min	10Min	15Min	30Min	60Min	2H	3H	4H	5H	10H	20H
1.60	60.1	38.4	28.5	17.4	9.79	6.17	4.35	3.38	2.78	1.60	0.863
1.65	58.9	37.5	27.4	17.0	9.66	5.98	4.28	3.32	2.74	1.59	0.860
1.70	56.0	35.9	26.4	16.7	9.48	5.89	4.25	3.29	2.74	1.58	0.856
1.75	53.9	34.6	25.9	16.6	9.27	5.82	4.25	3.26	2.72	1.58	0.853
1.80	50.7	34.3	25.2	16.0	9.12	5.66	4.19	3.23	2.68	1.55	0.837

The operating environment temperature above 40°C should be avoided. After long time storage, the battery actual capacity would be less than the rated capacity. Full capacity will be obtained through several charge/discharge cycles. To get the longest life, KSTAR battery should be fully charged before storage.


Cycle Service Life in Relation to Depth of Discharge

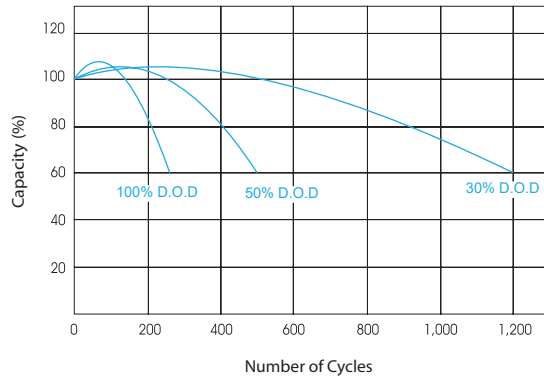


Constant Voltage Charge Characteristic

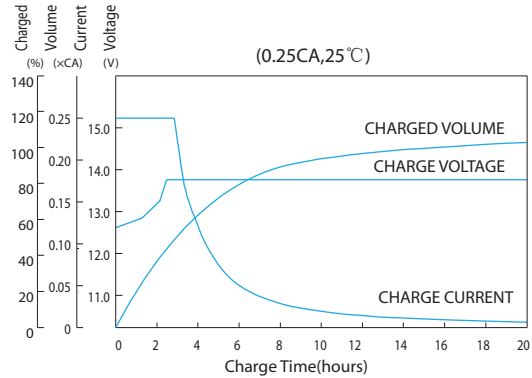


Self-Discharge Characteristics

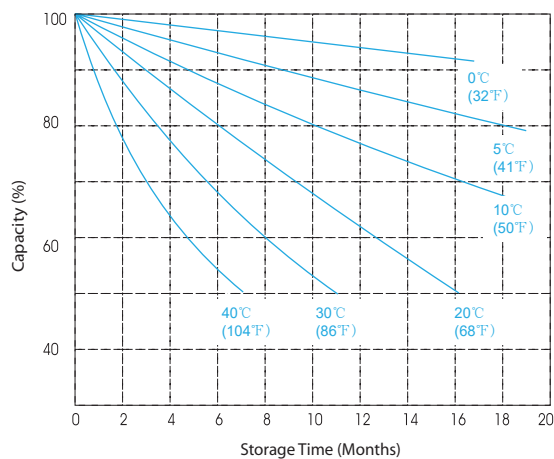


Relationship of OCV and Residual Capacity % (25°C)

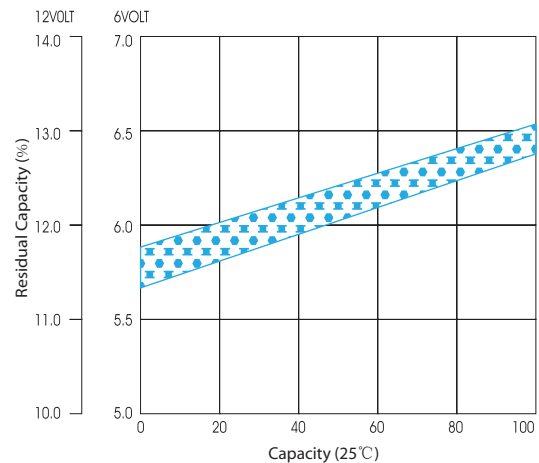

Temperature Effects on Capacity

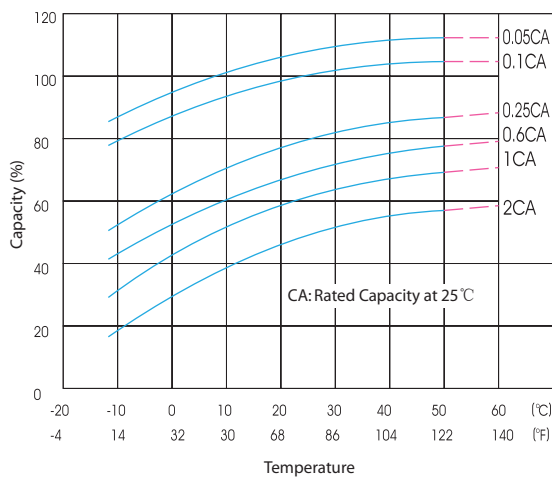

Temperature Effects Float Life

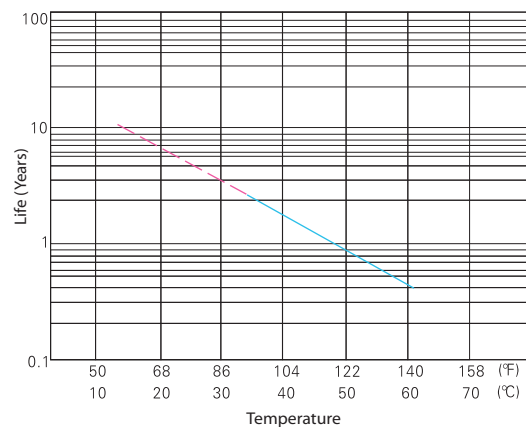

The final interpretation of the content of this color page is owned by kstar company. If the product upgrade causes a discrepancy with the content of this color page, we will not notify you in time. Please forgive me.

Version number: A0 2023-10