

## DS-7200HQHI-F2/N SERIES TURBO HD DVR



### Features and Functions


- Connectable to HD-TVI, AHD, network and analog cameras;
- Support HIKVISION-C protocol for connecting camera over coax;
- Support enabling H.264+ to ensure high video quality with lowered bitrate;
- Simultaneous HDMI, VGA and CVBS outputs, and HDMI/VGA output at up to 1920 × 1080/60Hz resolution for DS-7208HQHI-F2/N and 4K (3840 × 2160) resolution for DS-7216HQHI-F2/N;
- One-key recording configurable;
- Redundant recording and holiday recording;
- Main stream and sub-stream parameters configurable for simultaneous recording;
- Support channel-zero encoding;
- Support 1080p lite mode enabled to realize the real-time 1080p lite and 720p lite resolution;
- Instant playback for assigned camera during multi-channel live view mode;
- Up to 8/16-ch synchronous playback at 1080p resolution;
- Playback at up to 256X speed;
- Main stream and sub-stream selectable for local/remote playback;
- Playback by smart search and VCA search;
- Customization of tags, searching and playing back by tags;
- Manual video quality diagnostics;
- Supports locking and unlocking of video files;
- HDD quota and group management; different capacity can be assigned to different cameras under quota mode;
- Two SATA interfaces provided;
- One RJ45 10M/100Mbps self-adaptive network interface for DS-7208HQHI-F2/N and one RJ45 10M/100M/1000Mbps self-adaptive network interface for DS-7216HQHI-F2/N;
- Supports access by EZVIZ Cloud P2P;
- Supports Hikvision DDNS (Dynamic Domain Name System).



## Specifications

Model	DS-7208HQHI-F2/N		DS-7216HQHI-F2/N	
Video/Audio input	Video compression	H.264		
	Video input	8-ch	16-ch	
		BNC interface (1.0Vp-p, 75 Ω), supporting coaxitron connection		
	Supported HDTV input	1080p/25Hz, 1080p/30Hz, 720p/25Hz, 720p/30Hz, 720P/50Hz, 720p/60Hz		
	Supported AHD input	720p/25Hz, 720p/30Hz		
	CVBS input	Support		
	IP video input	2-ch Up to 2.0MP resolution		
	Audio compression	G.711u		
Audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ)			
Video/Audio output	CVBS output	Support		
	HDMI/VGA output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60Hz, 1024 × 768/60 Hz	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60Hz, 1024 × 768/60 Hz	
	Encoding resolution	When 1080p Lite mode not enabled: 1080p(non-real-time)/720p/VGA/WD1/4CIF/CIF; When 1080p Lite mode enabled: 1080p lite/720p lite/VGA/WD1/4CIF/CIF		
	Frame rate	Main stream: 1/16 fps to real time frame rate Sub-stream: WD1/4CIF@12fps/2CIF (non-real-time); CIF/QVGA/QCIF (real time)		
	Video bit rate	32 Kbps to 6 Mbps		
	Audio output	1-ch, RCA (Linear, 1 KΩ)		
	Audio bit rate	64 Kbps		
	Dual-stream	Support;		
	Stream type	Video, Video & Audio		
	Synchronous playback	8-ch	16-ch	
Network management	Remote connections	128		
	Network protocols	TCP/IP, PPPoE, DHCP, EZVIZ Cloud P2P, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS		
Hard disk	SATA	2 SATA interfaces		
	Capacity	Up to 6TB capacity		
External interface	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the audio input)		
	Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface	
	USB interface	2 × USB 2.0	1 USB 2.0 on the front panel 1 USB 3.0 on the rear panel	
	Serial interface	1; RS-485 serial interface, half-duplex		
General	Power supply	12 VDC		
	Consumption (without HDD)	≤ 20W	≤ 30W	
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)		
	Working humidity	10% to 90%		
	Dimensions (W × D × H)	380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)		
	Weight (without HDD)	≤ 2 kg (4.4lb)	≤ 2 kg (4.4lb)	

## Physical Interfaces

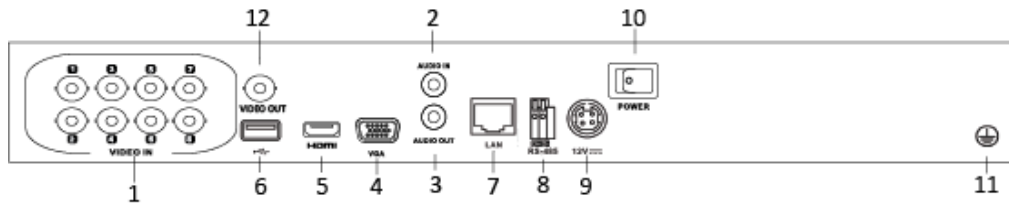

The rear panel of DS-7216HQHI-F2/N provides 16 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	7	LAN Network Interface
2	AUDIO IN, RCA Connector	8	RS-485 Serial Interface
3	AUDIO OUT, RCA Connector	9	12VDC Power Input
4	VGA Interface	10	Power Switch
5	HDMI Interface	11	GND
6	USB Interface	12	VIDEO OUT

## Available Models

DS-7208HQHI-F2/N, DS-7216HQHI-F2/N

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761