

Optical Fibre Cable Technical Specification

Aerial Cable

ADSS-80 3,0KN-nG657A1

NextraCom Optical Fibre Cable

All rights reserved

Customer Approval			
	Name	Signature	Date
Approved by			

1. Scope

This Specification covers the design requirements and performance standard for the supply of optical fibre cable in the industry. NextraCom ensures a stable quality control system for our cable products through several programs including ISO 9001, ISO 14001 and OHS.

Cable type	Application
ADSS-80 3,0KN-nG657A1	Self-supporting aerial installation

80M represent the span. n represent the number of fibres in the cable

1.1 Cable Description

Optical fibres are housed in loose tubes that are made of high-modulus plastic and filled with waterproof compounds.

FRP is applied as central strength member.

Loose tubes are SZ stranded around the central strength member.

The cable core is covered with water blocking tape to prevent from water ingress.

Aramid yarns are wrapped around cable core as peripheral strength member.

Polyethylene sheath are applied as outer sheath.

RipCORDs are added beneath Polyethylene sheath

1.2 Reference

The cable offered by NextraCom are designed, manufactured and tested according to the standards as follows:

ITU-T G.657	Characteristics of a single-mode optical fibre
IEC 60794-1-1	Optical fibre cables-part 1-1: Generic specification-General
IEC 60794-1-2	Optical fibre cables-part 1-2: Generic specification-Basic optical cable test procedure
IEC 60794-3	Optical fibre cables-part 3: Sectional specification-Outdoor cables
IEC 60794-4-20	Aerial optical cables along electrical power lines – Family specification for ADSS (All Dielectric Self Supported) optical cables

1.3 Life Time

Optical fibre cables supplied in compliance with this specifications is capable to withstand the typical service condition for a period of thirty (30) years without detriment to the operation characteristics of the cable.

2. Optical Fibre

Optical Fibres supplied in this specification meet the requirements of ITU-T G.657


Parameters	Specification
MFD (1310nm)	8.8+/-0.4um
MFD (1550nm)	9.8+/-0.5um
Cladding diameter	125+/-0.7um
Fiber diameter	245+/-5um, with UV coating, and colored to : 250+/-15um
Core/cladding concentricity error	≤ 0.5um
Coating/cladding concentricity error	≤ 12.0um
Cladding non-circularity	≤ 0.7%
Cut-off wavelength	$\lambda_{cc} \leq 1260\text{nm}$
Attenuation coefficient	1310nm: 0.36dB/km max after cabling 1550nm: 0.22dB/km max after cabling
Bending-loss performance of optical fibers @1550nm	≤0.03dB (10 turns around a mandrel of 30mm diameter)
Polarization mode dispersion link value	≤ 0.1 ps/ $\sqrt{\text{km}}$
Zero-dispersion wavelength	1312+/-12nm
Zero-dispersion slope	≤0.092ps/nm ² .km

3. Optical Cable


3.1 Technical Characteristics

- The unique second coating and stranding technology provide the fibres with enough space and bending endurance, which ensure good optical property of the fibres in the cable
- Accurate process control ensures good mechanical and temperature performance
- High quality raw material guarantees the long service life of cable


3.2 Cross Section of Cable

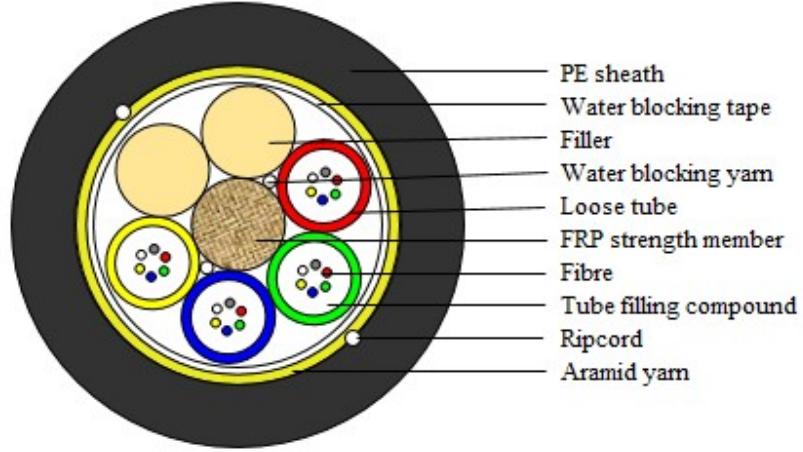


ADSS-80 3,0KN 24xG657A1(4x6)

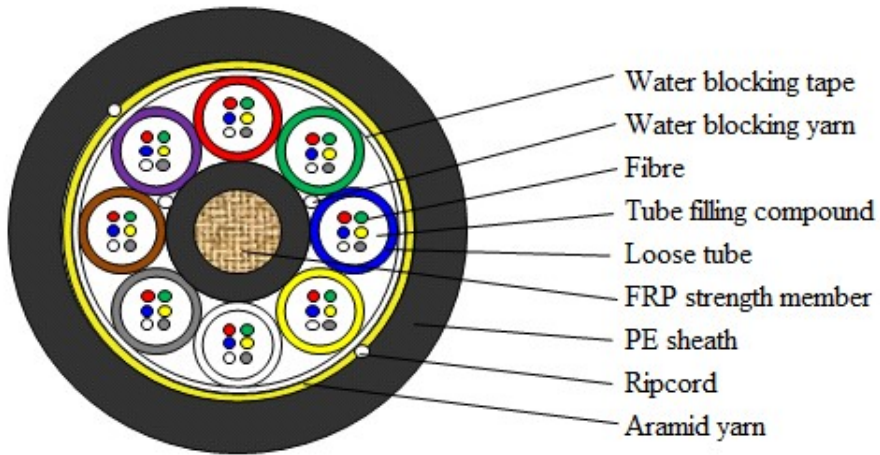


ADSS-80 3,0KM 48xG657A1(8x6)

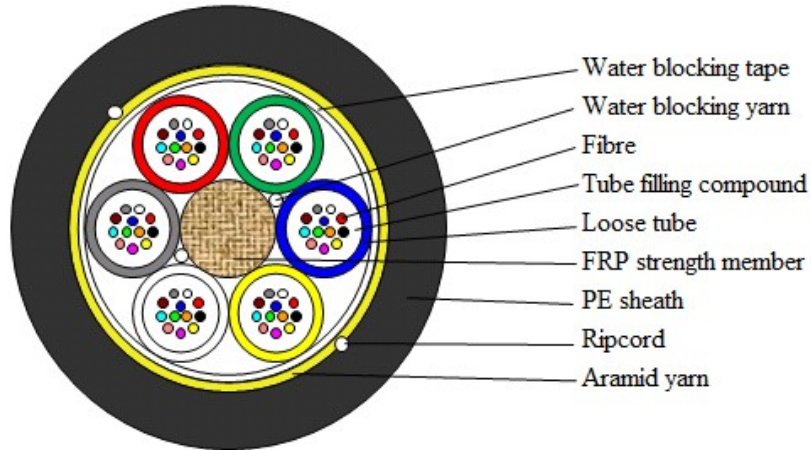

ADSS-80 3,0KN 72xG657A1(6x12)

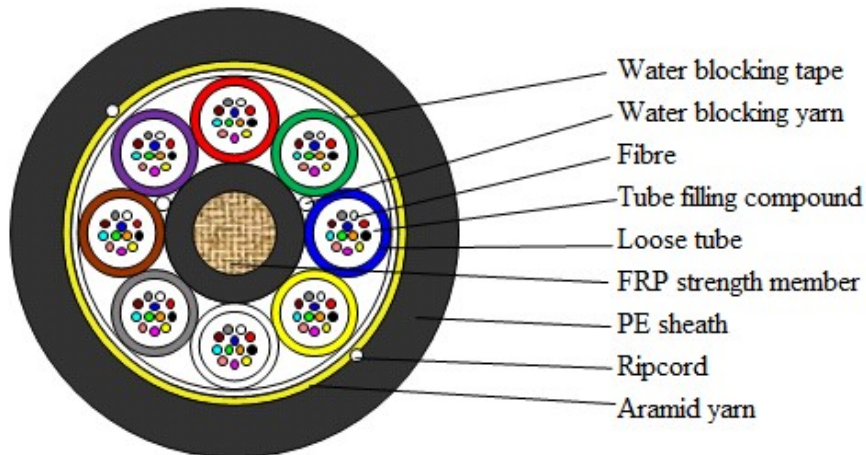

ADSS-80 3,0KN 96xG657A1(8x12)

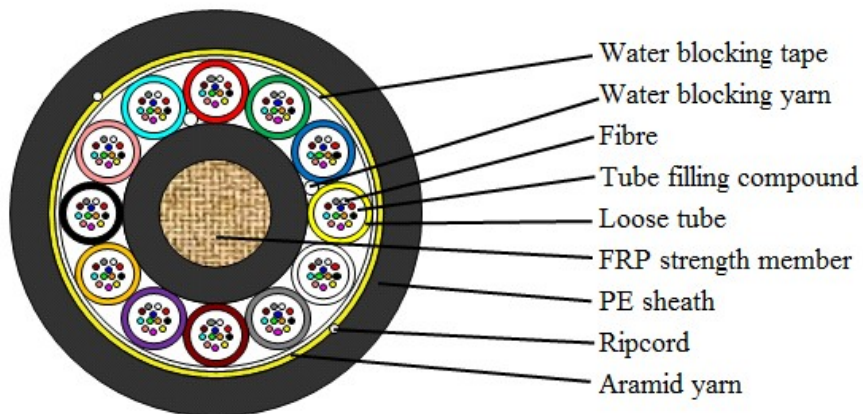

ADSS-80 3,0KN 144xG657A1(12x12)

3.3 Fibre and Loose Tube Identification

ADSS-80 3,0KN 24/48/72/96/144G657A1

The color code of fibres and loose tubes will be identification in accordance with the following color sequence, other sequence also is available.

Fiber Code	Color	1	2	3	4	5	6
		Red	Green	Blue	Yellow	White	Grey
		7	8	9	10	11	12
Loose Color Code	Tube	Brown	Violet	Aqua	Black	Orange	Pink
		1	2	3	4	5	6
		Red	Green	Blue	Yellow	White	Grey
Loose Color Code	Tube	7	8	9	10	11	12
		Brown	Violet	Orange	Black	Pink	Aqua

3.4 Dimensions and Descriptions

The standard structure of ADSS cable is shown in the following table, other structure and fibre count are also available according to customer requirements.

Item	Contents	Value				
		24	48	72	96	144
Loose tube	Number	4	8	6	8	12
	Outer diameter (mm)	2.1	2.1	2.4	2.4	2.4
Filler	Number	2	-	-	-	-
Max. fiber counts per tube	G.652D	6	6	12	12	12
Central strength member	Material	FRP				
	Diameter (mm)	2.25	2.6	2.6	3.0	3.5
	PE layer diameter (mm)	-	3.5	-	4.2	7.2
Water Blocking Material	Material	Water blocking yarn and tape				
Additional strength member	Material	Aramid yarn				
Sheath	Material	HDPE				
	Color	Black				
	Thickness(mm)	Nominal: 1.5				
Ripcord	Number	2				
Cable diameter(mm) Approx.		10.3	11.5	11.2	12.7	15.7
Cable weight(kg/km) Approx.		80	105	95	120	180

3.5 Main Mechanical and Environmental Performance

Main mechanical performance

Max. pole distance(M)	Tensile performance(KN)
	MAT
80	3.0

Crush(N/100mm)	
Short term	Long term
1500	750

Environmental and installation condition

Max. wind speed	Max. ice thickness	Initial Installation sag	Temperature
17.8m/s	12.5mm	1.0%	-40~+70°C

4. Main Mechanical, Physical and Environmental Test Characteristics

The mechanical and environmental performance of the cable are in accordance with the following table. Unless otherwise specified, all attenuation measurements required in this section shall be performed at 1550nm.

Items	Test Method	Requirements
Tension	<u>IEC 60794-1-2-E1</u> Load: According to 3.5 Sample length: Not less than 50m. Duration time: 1min.	Additional attenuation: ≤ 0.1 dB No damage to outer jacket and inner elements
Crush	<u>IEC 60794-1-2-E3</u> Load: According to 3.5 Duration of load: 1min	Additional attenuation: ≤ 0.1 dB No damage to outer jacket and inner elements
Impact	<u>IEC 60794-1-2-E4</u> Radius: 300 mm Impact energy: 10 J Impact number: 3 Impact points: 10	Additional attenuation: ≤ 0.1 dB No damage to outer jacket and inner elements
Bend	<u>IEC 60794-1-2-E11A</u> Mandrel radius: 10*D Turns:4 Cycles:3	Additional attenuation: ≤ 0.1 dB No damage to outer jacket and inner elements
Repeated bending	<u>IEC 60794-1-2-E6</u> Bending radius: 20*D Cycles: 25 Load: 150N	Additional attenuation: ≤ 0.1 dB No damage to outer jacket and inner elements
Torsion	<u>IEC 60794-1-2-E7</u> Cycles:10 Length under test: 1m Turns: $\pm 180^\circ$ Load: 150N	Additional attenuation: ≤ 0.1 dB No damage to outer jacket and inner elements
Water Penetration	<u>IEC 60794-1-2-F5B</u> Time : 24 hours Sample length : 3m Water height : 1m	No water leakage.
Temperature cycling	<u>IEC 60794-1-2-F1</u> Sample length: at least 1000m Temperature range: $-40^\circ\text{C} \sim +70^\circ\text{C}$ Cycles: 2 Temperature cycling test dwell time: 12 hours	The change in attenuation coefficient shall be less than 0.1 dB/km.
Other parameters	According to IEC 60794-1	

5. Packaging and Drum

5.1 Cable Sheath Marking

Unless otherwise specified, the cable sheath marking shall be as follows:

- Color: white
- Contents: NEXTRA OPTICAL CABLE, the type of cable, the year of manufacture, length marking
- Interval: $1\pm 0.2\%$ m

Outer sheath marking legend can be changed according to user's requests.

5.2 Reel Length

Standard reel length: 4 km/reel, other length is also available.

5.3 Cable Drum

The cables are packed in fumigated wooden drums.

5.4 Cable Packing

Both ends of the cable will be sealed with suitable plastic caps to prevent the entry of moisture during shipping, handling and storage. The inner end is available for testing.