


Operation manual

Pen type visual fault

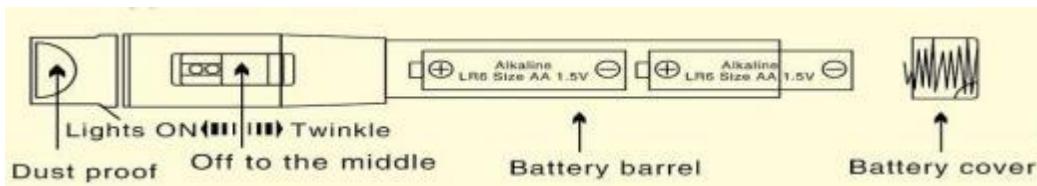

1. Please place batteries in accordance with the photoinstruction to avoid improper work or damage to the equipment.

2. Switch upwards to turn the lights on downwards to twinkle and middle to shut down.

Product quality assurance card

Product name: pen type visual fault locator

warranty coverage:

1. The product with any hardware or software fault caused by product quality period to be returned manufacturer or authorized customer service center for repair free of charge
2. Under any of these situations, the product not to be repaired free of charge:
 - (1) defect liability period expired
 - (2) product to be used maintained or kept unin accordance with the instruction.
 - (3) disposable battery box is consumable material.
 - (4) not repairable damage caused by transportation.
 - (5) accident or force majeure

Technical parameter

Model Number Suffix	1mw	5mw	10mw	15mw	20mw	25mw	30mw	50mw
Output optical power	≥1mw	≥5mw	≥10mw	≥15mw	≥20mw	≥25mw	≥30mw	≥50mw
Output wavelength	650nm							
Fiber optic adapter	Universal connector							
Use temperature	0~+60 Centigrade							
Storage temperature	-20~+70 Centigrade							
Battery type	5 alkaline battery 2							
Battery life	>40h	>12h				>10h		
Appearance	175mm*26mm*26mm							
Weight	173g							