
	TECHNICAL DATA SHEET	code	70057-70061
		version	5
	AES/EBU Multi-Pair Snake Cable FRNC	date	2010-02-11
	1-16 pair 24AWG (0.22mm ²)	page	1/3

APPLICATION

Digital multi-modulation cable used in professional studios for the transmission of analogue and digital audio signals. Designed to meet the requirements of the AES/EBU specification

CONSTRUCTION

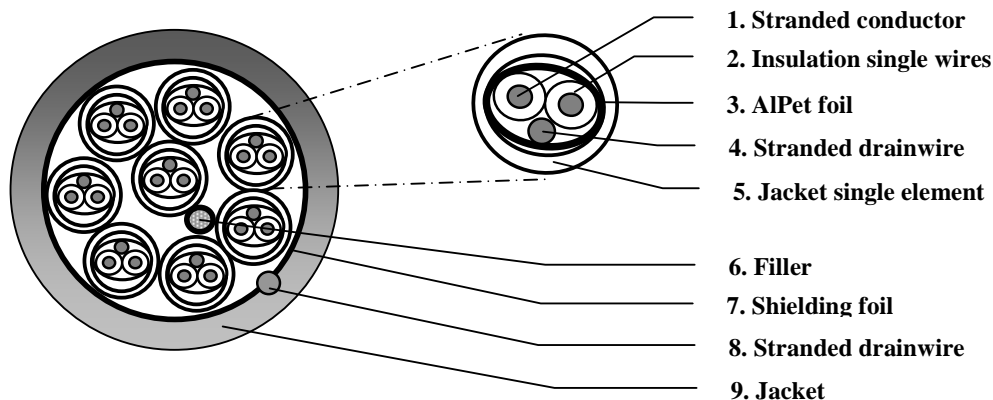

Each pair individually shielded with Beldfoil® aluminium-polyester shield. Individual pairs with numbered FRNC jacket.

Overall Beldfoil® aluminium-polyester shield. Overall FRNC jacket.

1. Conductor

Material	Bare oxygen free copper
Dimension	7 x 0.20mm (AWG 24)

2. Insulation single wires


Material	Foam Polyethylene
Diameter over insulation	1.40 ± 0.03 mm
Colour of insulation	White and Blue

3. Shielding Beldfoil ®

Material	ALPet foil with Aluminum inside
Coverage	100%

4. Drainwire

Material	Tinned copper
Dimension	7 x 0.20mm (AWG 24)

	TECHNICAL DATA SHEET		code	70057-70061
			version	5
	AES/EBU Multi-Pair Snake Cable FRNC		date	2010-02-11
	1-16 pair 24AWG (0.22mm ²)		page	2/3

5. Jacket

Material FRNC
Diameter 3.4 ± 0.1 mm
Elements are numbered for identification

Cable n pairs

6. Filler

7. Foil shield

Material Aluminum-polyester
Coverage 100%


8. Drainwire

Material Tinned copper
Dimension 7 x 0.20mm (AWG 24)

9. Outer jacket

Material FRNC

Part number	Number of pairs	Nominal O.D.	Wall thickness
70057	2	9.2	1.1
70058	4	10.8	1.2
70059	8	14.2	1.2
70060	12	16.5	1.3
70061	16	18.6	1.3

	TECHNICAL DATA SHEET		code	70057-70061
			version	5
	AES/EBU Multi-Pair Snake Cable FRNC		date	2010-02-11
	1-16 pair 24AWG (0.22mm ²)		page	3/3

REQUIREMENTS AND TEST METHODS

Electrical:

Impedance 0.1-6 MHz	110 Ohm +/- 15 Ohms
Nominal capacitance conductor to conductor @ 1 kHz	40 pF/m
Nominal conductor DC resistance @ 20°C	86 Ohm/km
High voltage test conductor-conductor	1.0 kVdc
High voltage test conductors-shield	1.0 kVdc
Nominal velocity of propagation:	80 %

Mechanical and physical:

Temperature rating	-30 to +70 °C
Resistance to flame propagation:	IEC 60332-1
FRNC material	
Corrosivity	IEC 60754-1 & IEC 60754-2
LOI	>34%
Minimum bending radius without load	10 x cable diameter
Minimum bending during install with load	15 x cable diameter

MARKING ELEMENT

Element number	Element color	RAL Like	Text
1 – 8	Grey	7001	<u>X</u> <u>X</u> <u>X</u> <u>X</u>

X: Element number, at maximum 2 cm intervals, alternately inverted.



Belden CDT believes this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.